
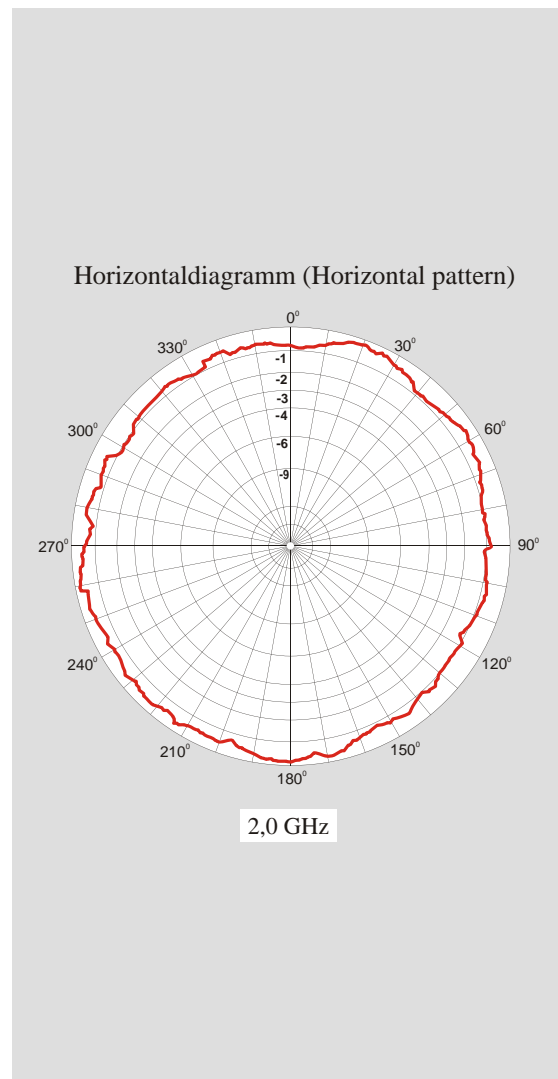


Datenblatt (Data sheet)
STS 2000 UMTS

Bestellnummer (Order No.): 4940001

Innen-Rundstrahlantenne UMTS (Indoor omnidirectional antenna UMTS)

Stand (Updated): **11/2013**

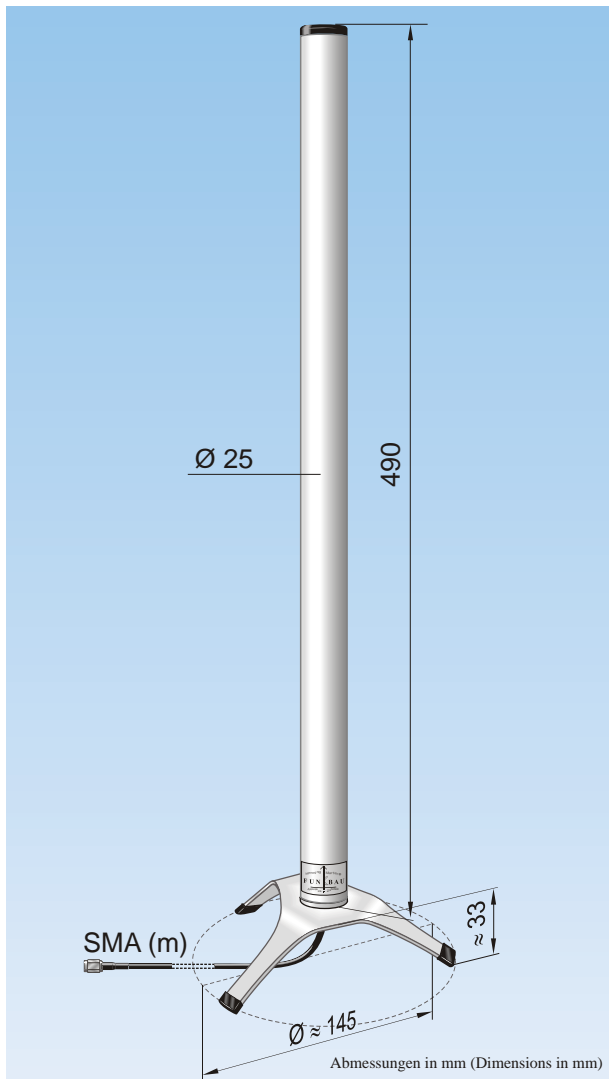

Frequenzbereich (Frequency range):	1900 MHz-2170 MHz
Impedanz (Impedance):	50
Polarisation (Polarisation):	vertikal (Vertical)
Gewinn (Gain)*:	6 dBi
VSWR:	2,0
Maximale Belastbarkeit (Max. power)**:	10 W
Gewicht ca. (Weight approx.):	200 g
Höhe/Breite (Height/Width):	523 mm / 145 mm
Kabel/Anschluss (Cable/connector):	1,45 m RG 174/SMA-Stecker (Male)
Material:	Strahler aus Kupfer, GFK, Schutzrohr aus UV-beständigem Kunststoff, Antennenfuß aus Aluminium (Radiator of copper, GFK, protecting tube of UV resistant plastic; Antenna base of aluminium)

*) Mittelwert, bezogen auf den isotropen Strahler (Average, referred to isotropic radiator)

**) bitte gesetzliche Bestimmungen beachten (Please pay attention to lawful regulations)

Änderungen vorbehalten (Subject to change without notice)